


Escape (ESC) 2020/08


designed by Birger Garbe / Ulzburger Kites

version STD

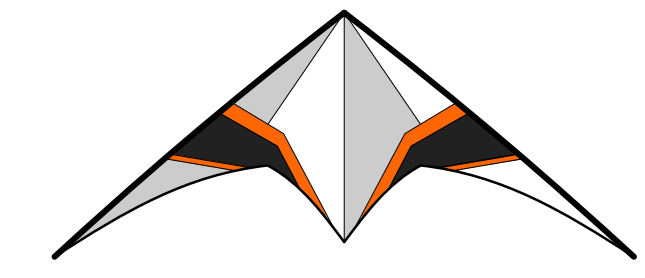

leading edge	Aurel Agil 400 or P200	1500 mm
upper part	full length		
lower part	shortened		
upper spreader	5mm	495 mm
lower spreader	SkyShark Nitro	700 mm
	shortened at the thick end		
spine	Aurel Agil 400 or P200	850 mm
weight (brass)	6mm/60mm	15 gr
standoff	glas fiber 3mm	275 mm (rod to sail)


version LW

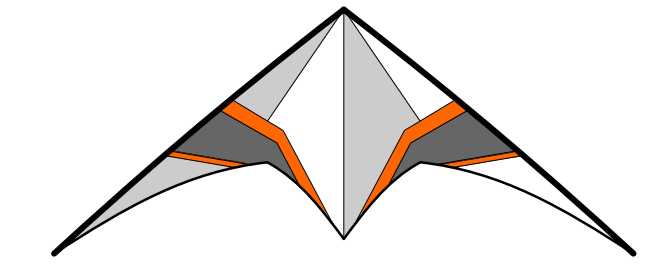

leading edge	Aurel Agil 600 or P100	1500 mm
upper part	full length		
lower part	shortened		
upper spreader	5mm	495 mm
lower spreader	SkyShark Nitro Lite	700 mm
	shortened at the thick end		
spine	Aurel Agil 600 or P100	850 mm
weight (brass)	6mm/60mm	15 gr
standoff	glas fiber 3mm	275 mm (rod to sail)

3-point bridle

(A) Birger:	low pressure, precision	
(B) Stephan:	more stable fade, reduced dead point in the pancake	
	(A)	(B)
upper outhaul	530 mm 555 mm
outer outhaul	480 mm 520 mm
inhaul	640 mm 625 mm



[Escape]